

MOVED BY FEELINGS

		1200X1200MM		





Versatile Size



LIFE IS IN PERPETUAL MOTION

We want to accompany you with

our products on this path of sensations

Our desire is for you to come into your home and identify with it

We all love being able to open our doors to our loved ones


and share unique moments that create this set of sensations

that permeate the rooms of our home

I des start creating your home together



ADVANTAGES OF THE TREATMENT

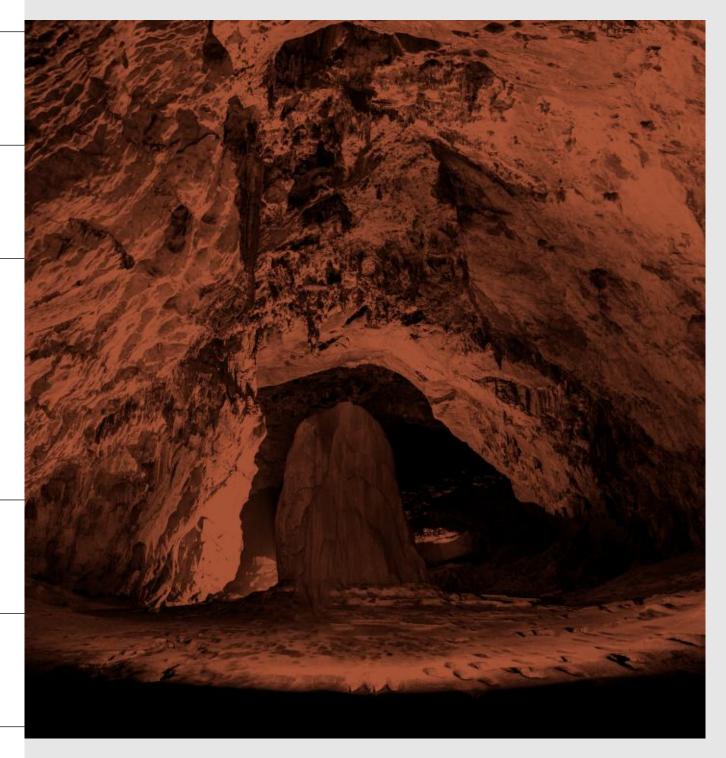

A HIGHLY VERSATILE PROCESS



Inique natural looking surfaces with a design
evocative of natural minerals or rock
Industrially manufactured without harming
our precious natural environment

Shaped combines digital and traditional techniques that allows us to coordinate the graphics with the relief to achieve volume on the surface and an extra soft texture that reproduces the natural stone in all its senses



VERSATILE



TECHNICAL DESIGN

The appeal of the surfaces is further enhanced by exclusive new Finishes such as antique 3d which creates the sensation of timeworn Floors in historic italian buildings and stately homes

- FACADES (
- HOSPITALS
- FOOD INDUSTRY
- SWIMMING POOLS, SPAS & SPORTS CENTRES
- HOTELS AND RESTAURANTS
 - RESIDENTIAL BUILDINGS (INSIDE & OUTSIDE)
 - CLINICS, SCHOOLS & OFFICE BUILDINGS
 - SHOPPING CENTRES & SUPERMARKETS
 - STATIONS & AIRPORTS





















THE COLLECTION

Premiere is a collection worthy of the best stages

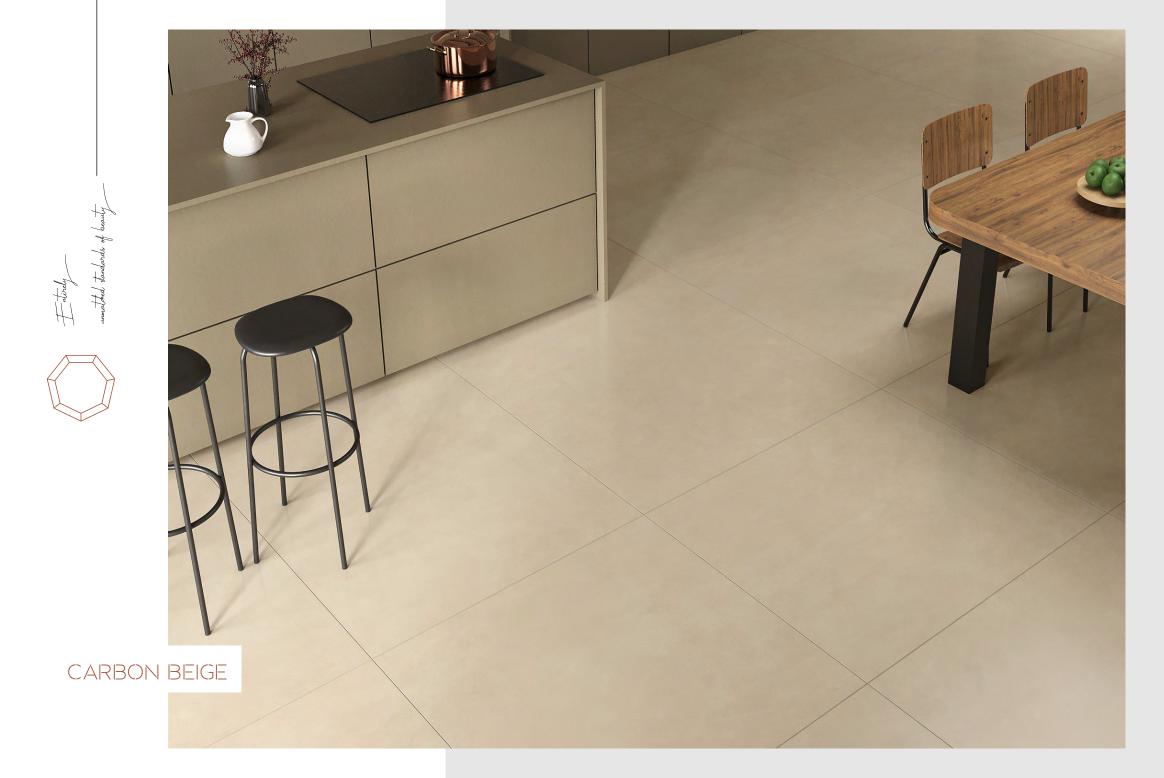





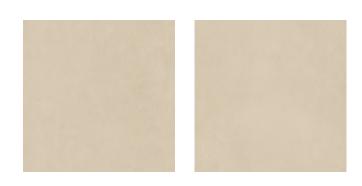






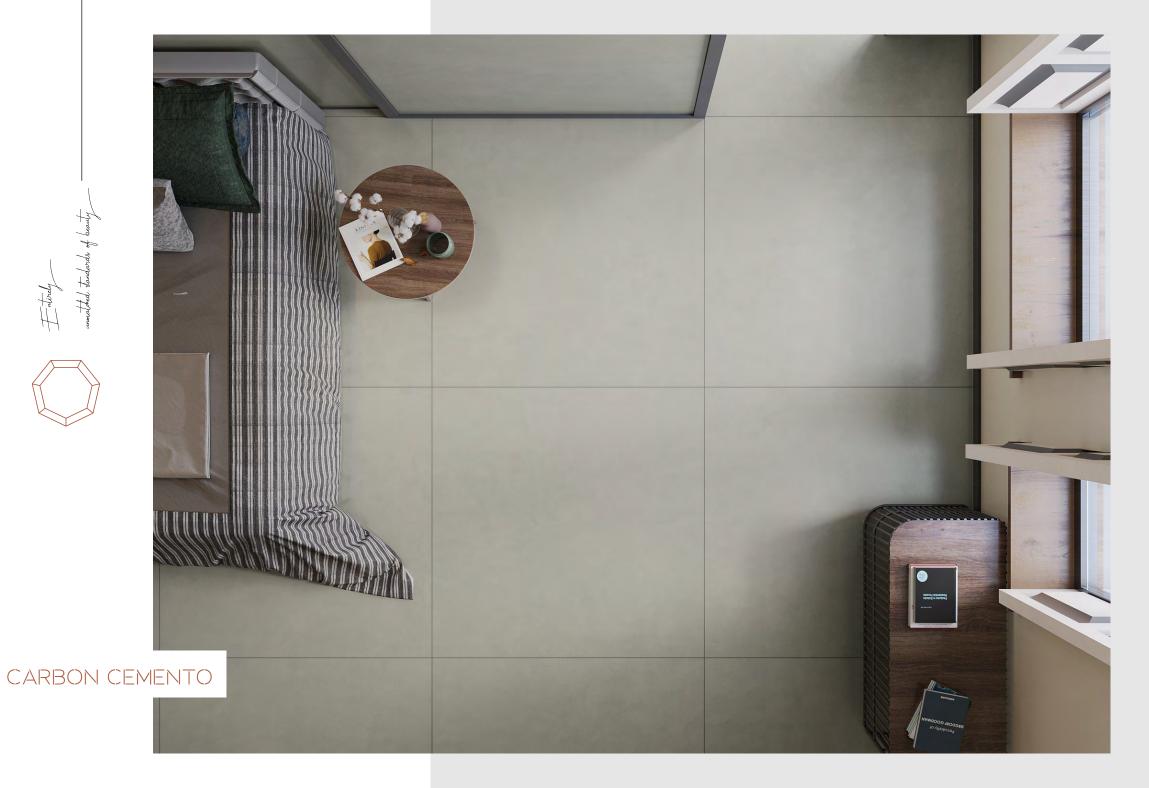


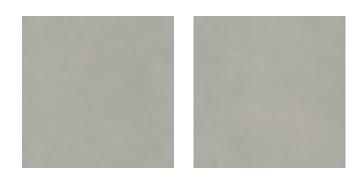






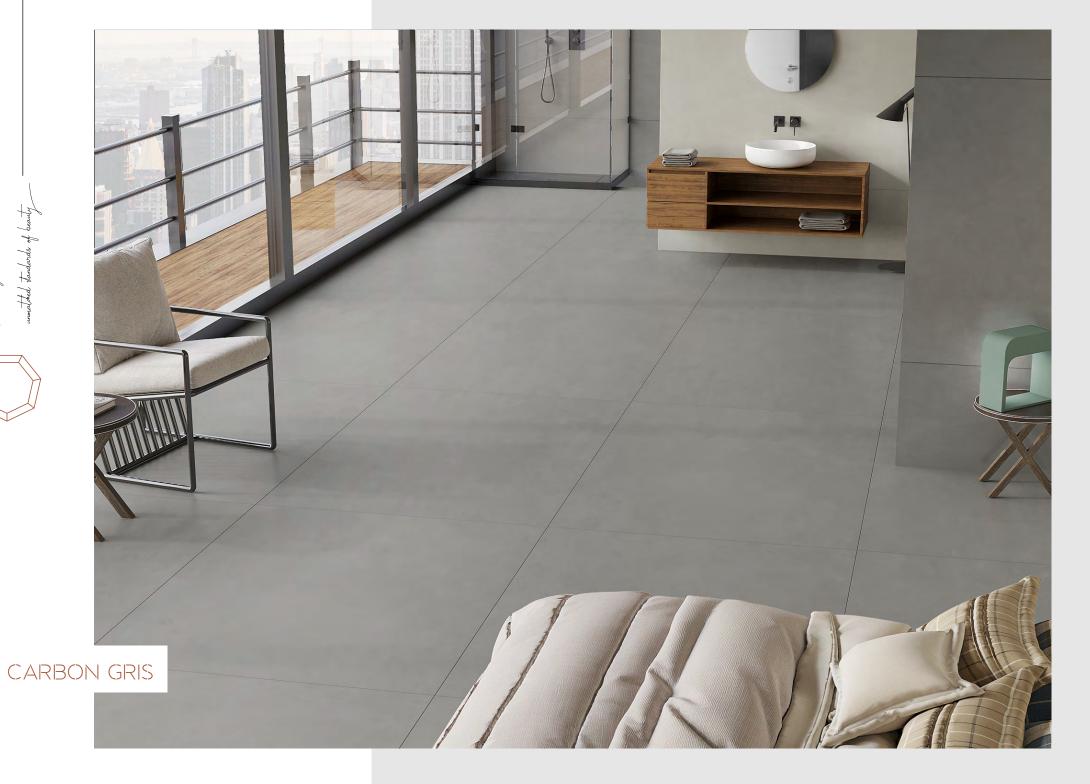


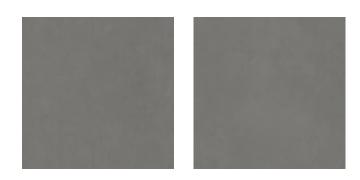







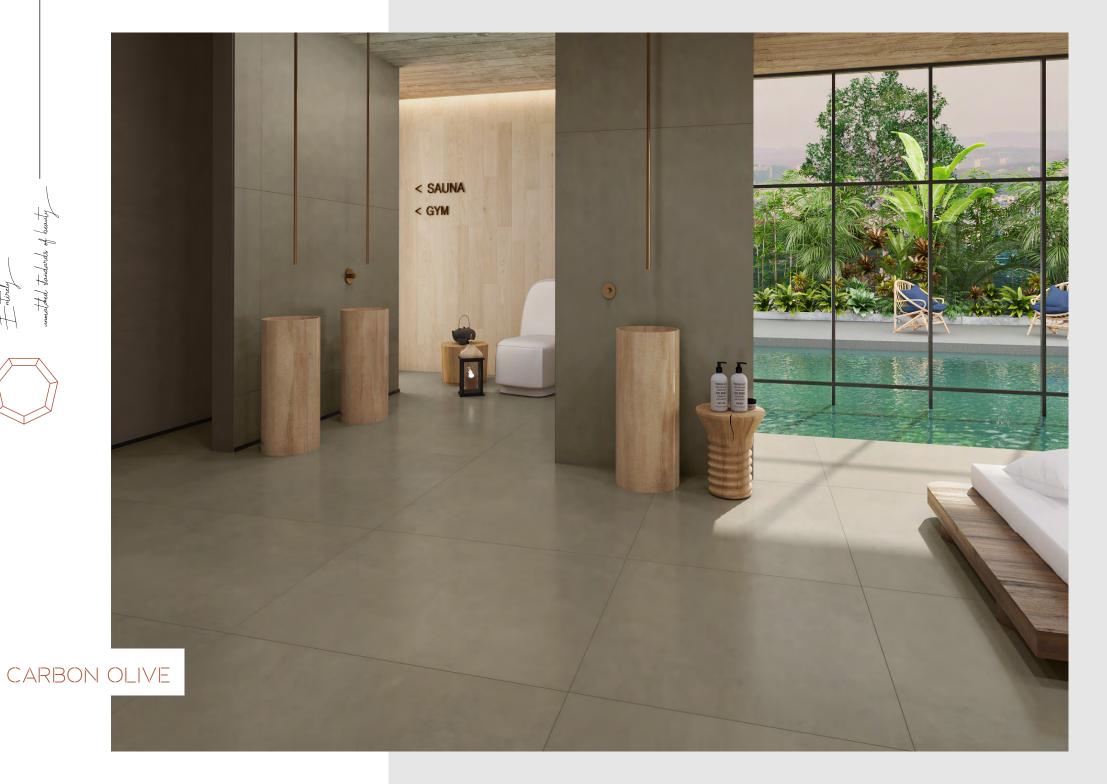

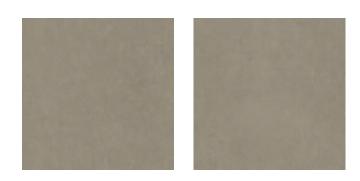



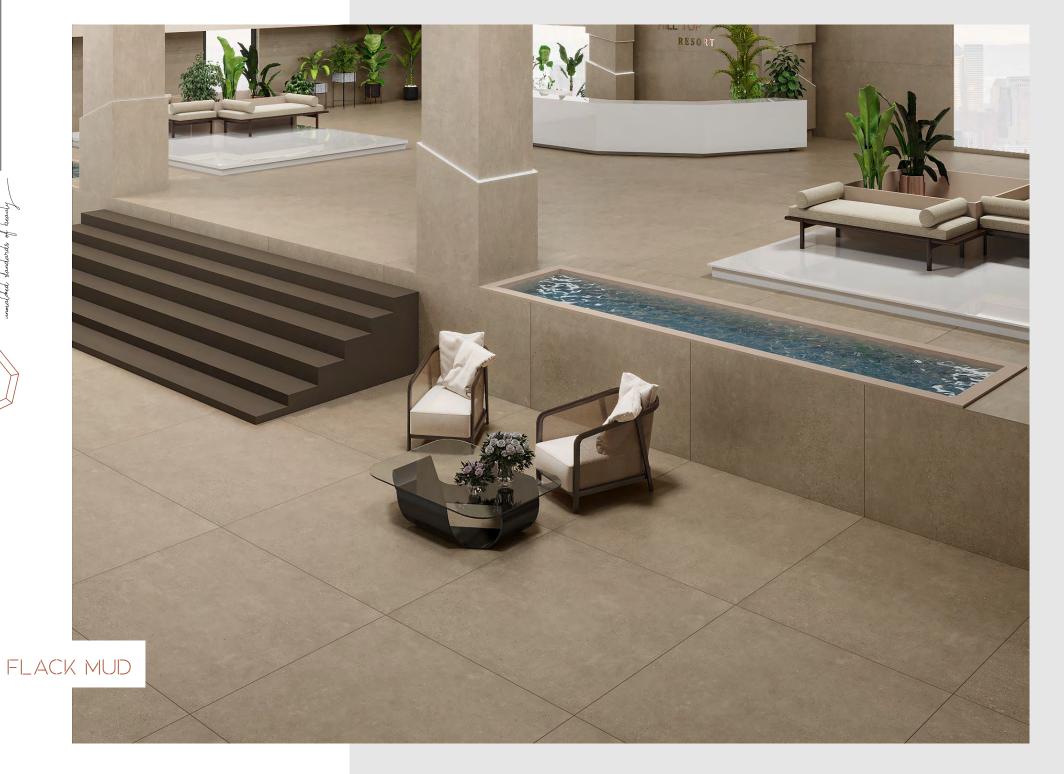


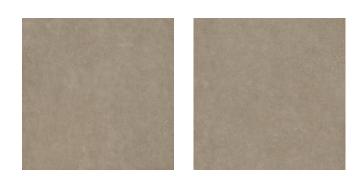



FLAKE FUME




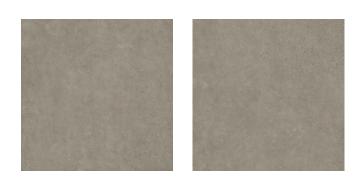



unmathed standards of beauty



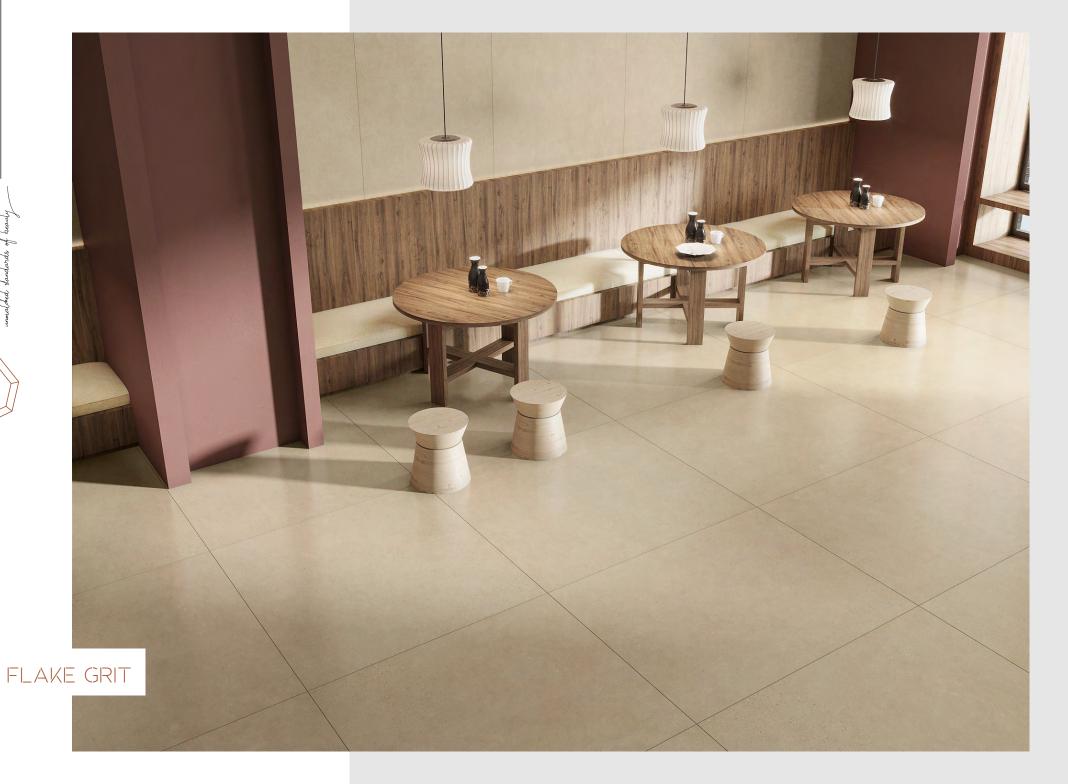











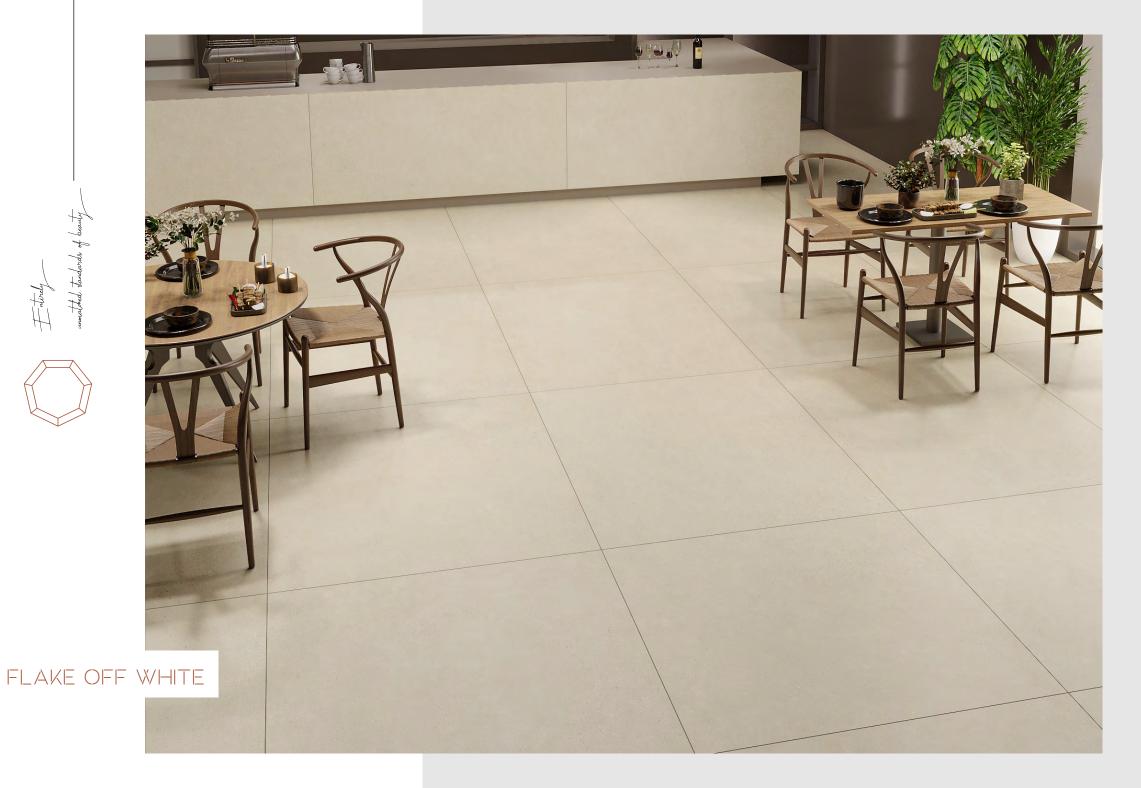



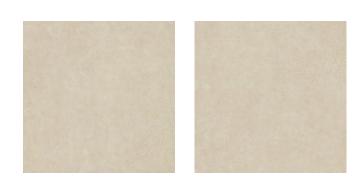



TECHNICAL specification

CHARACTERISTIC	STANDERD AS PER ISO - 13006/EN14411 GROUP Bla	MEAN VALUE OF 1200X1200MM	TEST METHOD		
REGULATORY PROPERTIES					
Deviation in length & width Deviation in thickness Straightness in side Rectangularity Surface flatness Color difference Glossiness	± 0.5% ± 5.0% ± 0.5% ± 0.5% ± 0.5% Unalterd As per mfg	± 0.5% ± 5.0% ± 0.5% ± 0.5% ± 0.5% No change NOT APPLICABLE (MATT)	ISO-10545-2. ISO-10545-2 ISO-10545-2 ISO-10545-2 ISO-10545-2 ISO-10545-16 GLOSS METER		
STRUCTURAL PROPERTIES					
Water absorption Apparent density	<0.50% >2.0 g/cc	<0.50 % > 2.10 g/cc	ISO-10545-3 DIN 51082		
MASSIVE MECHANICAL PROPERTIES					
Modulus of rupture Breaking strength Impact resistance	Min. 35 N/mm2 Min. 1300 N As per mfg.	Min. 35 N/mm2 Min. 1300 N Min. 0.55	ISO-10545-4 ISO-10545-4 ISO-10545-5		
SURFACE MECHANICAL PROPERTIES					
Surface abrasion resistance MOH's hardness	As per mfg As per mfg	Min. Class-3 Min. 4	ISO-10545-7 EN 101		
THERMO HYGROMETRIC PROPERTIES					
Frost resistance Thermal shock resistance Moisture expansion Thermal expansion(CE)) Crazing resistance	No damage No damage Nil Max. 9.0 x 10-6 As per mfg	No damage No damage Nil Max. 6.5 x 10-6 Min. 10 Cycle	ISO-10545-12 ISO-10545-9 ISO-10545-10 ISO-10545-8 ISO-10545-11		
CHEMICAL PROPERTIES					
Chemical resistance Stain resistance	No damage Resistant	No damage Resistant	ISO-10545-13 ISO-10545-14		
SAFETY PROPERTIES					
Slip resistance Fire resistance Lead & Cadmium given off by glazed tiles	As per mfg As per mfg As per mfg	>0.40 Fireproof Does not yield- Pb & Cd	ISO-10545-17 N. A. ISO-10545-15		

SIZE	THICKNESS (Approx*)	PIECES/BOX	AREA / BOX (Approx*)	WEIGHT / BOX (Approx*)
1200x1200 mm	9mm	2 pcs.	2.88 sq.mtr, 31 sq.ft	60kg

Thank you for your time