



G L O S S Y
C O L L E C T I O N



GVT | PGVT | 600X1200MM

Our Vision



always
motivates us
to keep going
and improving.

ABOUT US

With the help of great experience from latest technology structured as Tiles Manufacturer and Exporter. We are one of biggest exporter of tiles with production capacity of 30240 sqm / day. aims to revolutionize the industry by introducing never before seen tiles design that are sure to raise the bar of grandeur a notch higher.

The company has imported machineries from Italy and more than 600 experienced workers to satisfy our customers with quality output. Machineries are from Italy based Sacmi Technology, Digital

Printer are from System Digital Machine and Polishing Line from KEDA. Our land premises is 113000 sqm.

We are manufacturer and exporter of Porcelain Tiles, Glazed Vitrified Tiles (GVT), Polished Glazed Vitrified Tiles (PGVT), Soluble Salt Tiles (Nano), Vitrified Tiles. Our network is expanded to pan India with more than 500 Dealers.

We Export in: Argentina, Brazil, Indonesia, Mexico, Nepal, Peru, South Africa, South Korea, Spain, Ukraine, United Kingdom, Taiwan and many more...




g'loss

This tile is gives the exclusive look and completion each and every corner. it is the look of fantasy. This tile is gives the exclusive look and completion each & every corner it is the look of fantasy.



Atiants Grey

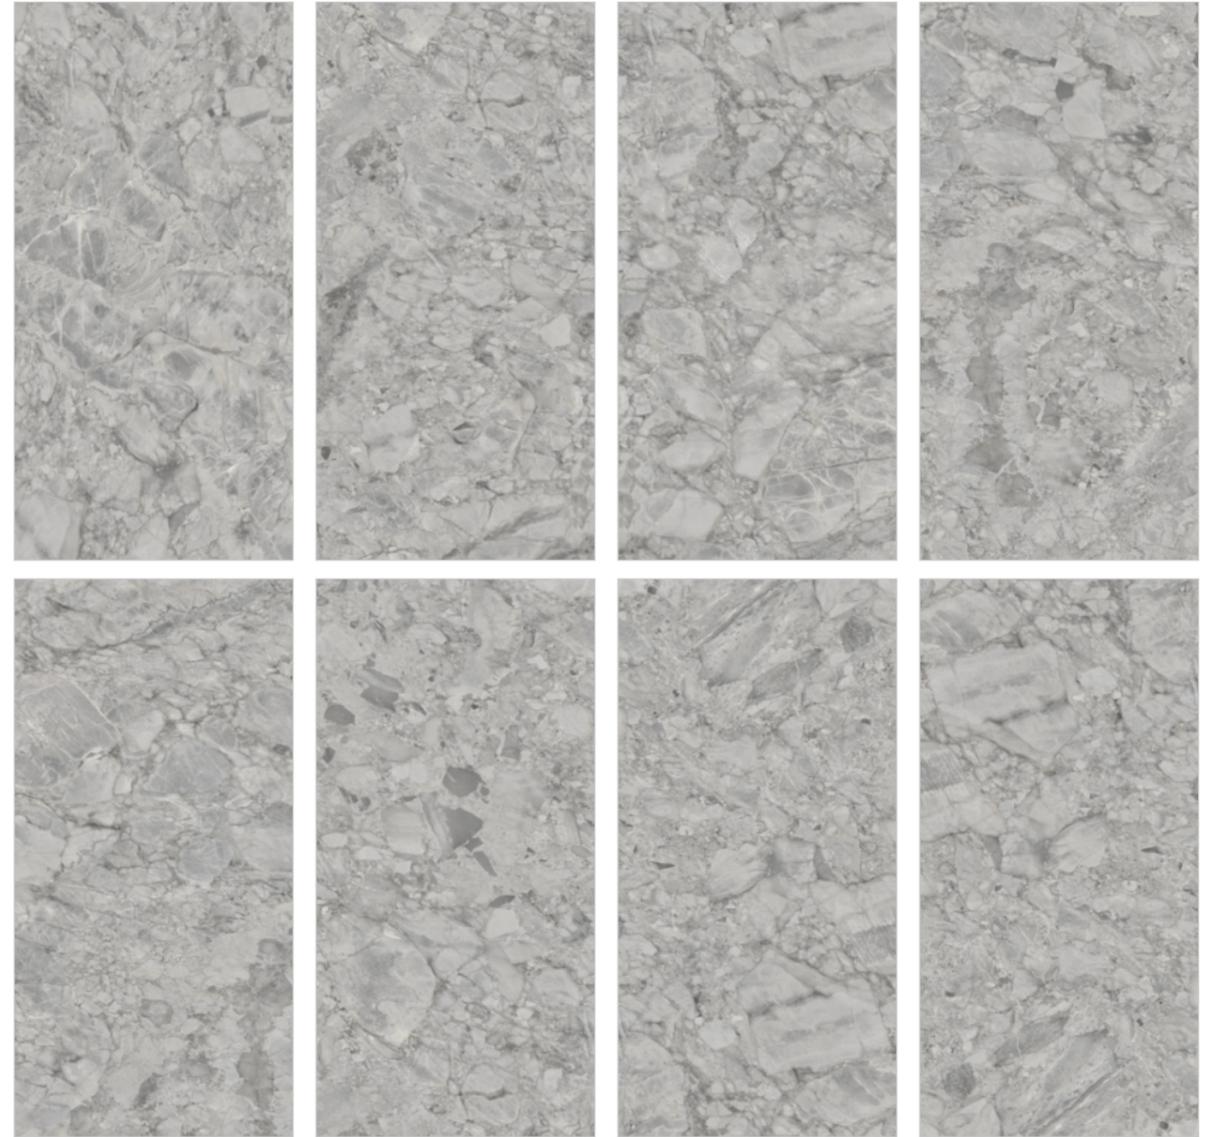

Random
08
600x1200mm



Authentic Beige



Random
08
600x1200mm



Authentic Bianco



Rendom
08
600x1200mm



Authentic Bianco



Breeze Grey


glossy



Rendom
07
600x1200mm



California Almond

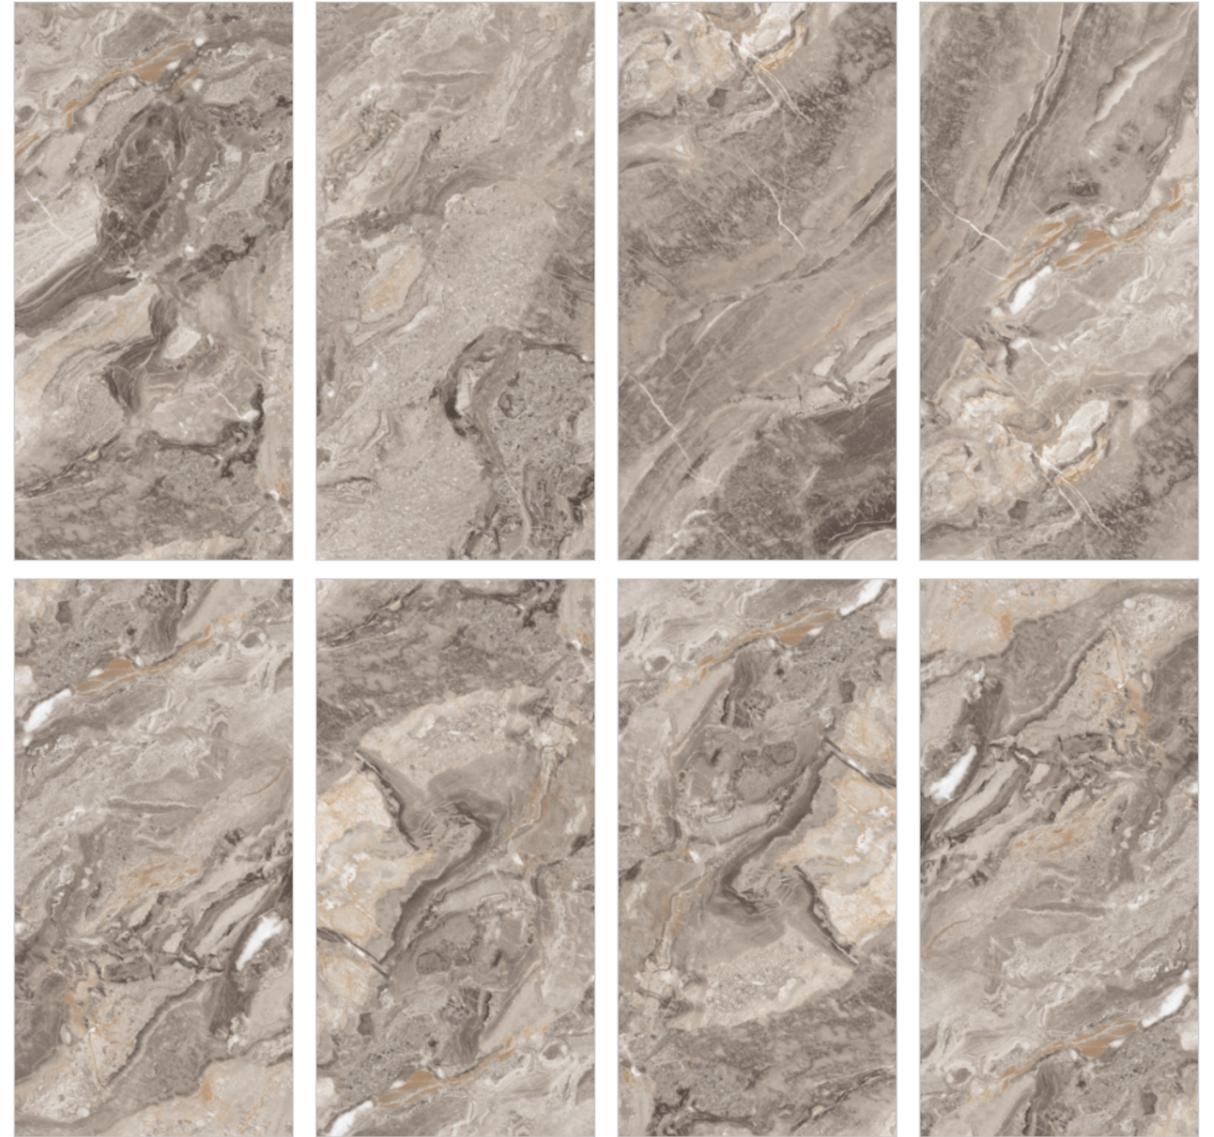


Random
07
600x1200mm



California Grey

glossy

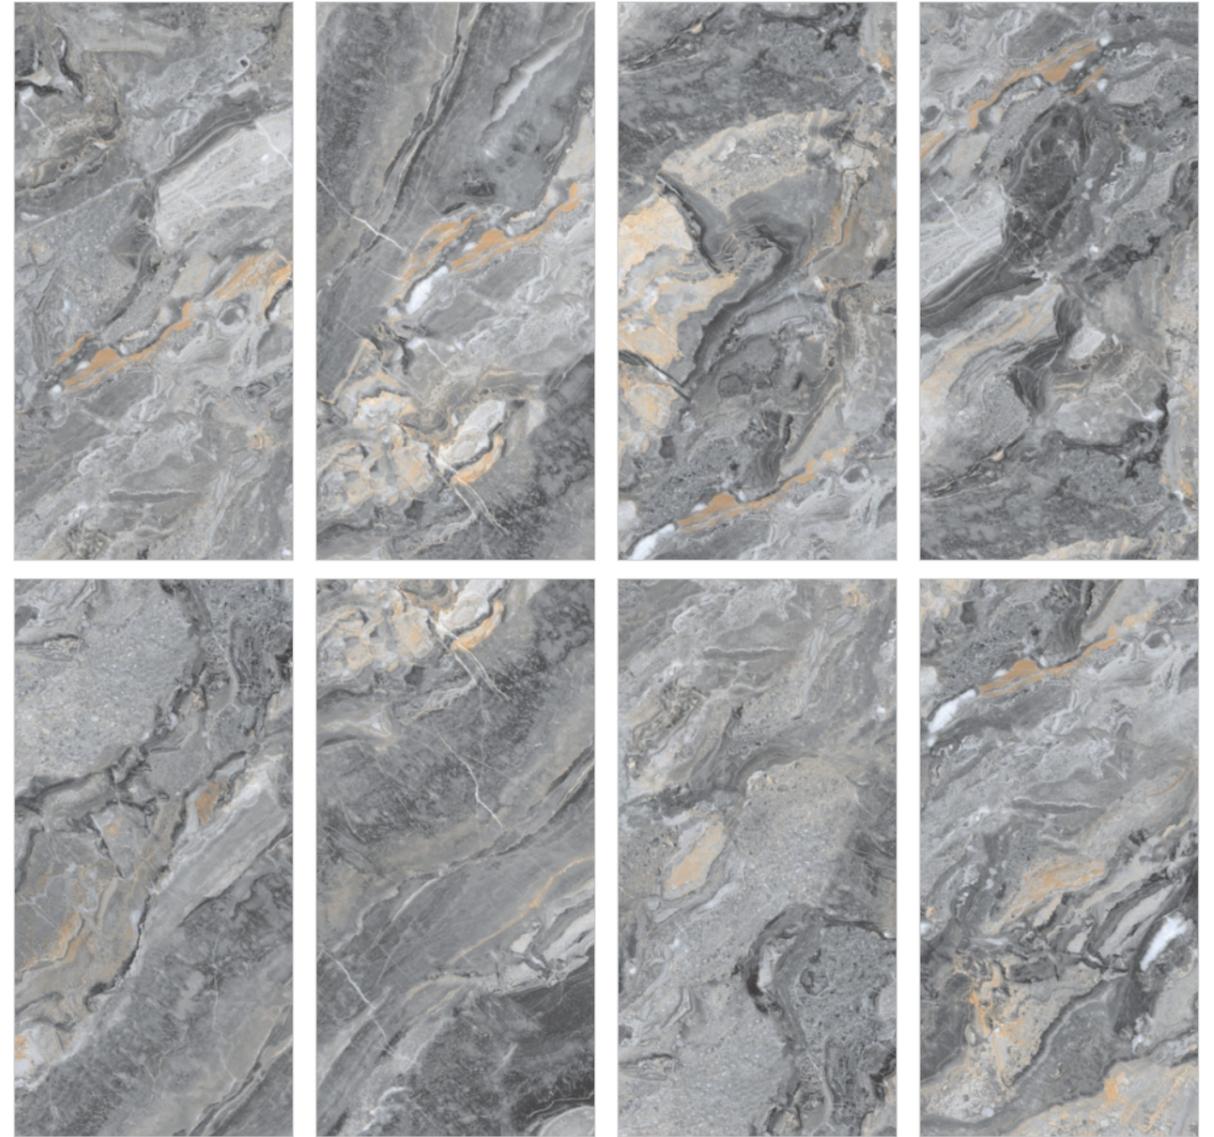

Rendom
09
600x1200mm



Califonia Grey




Cipolino Beige



Rendom
08
600x1200mm



Crescent Brown

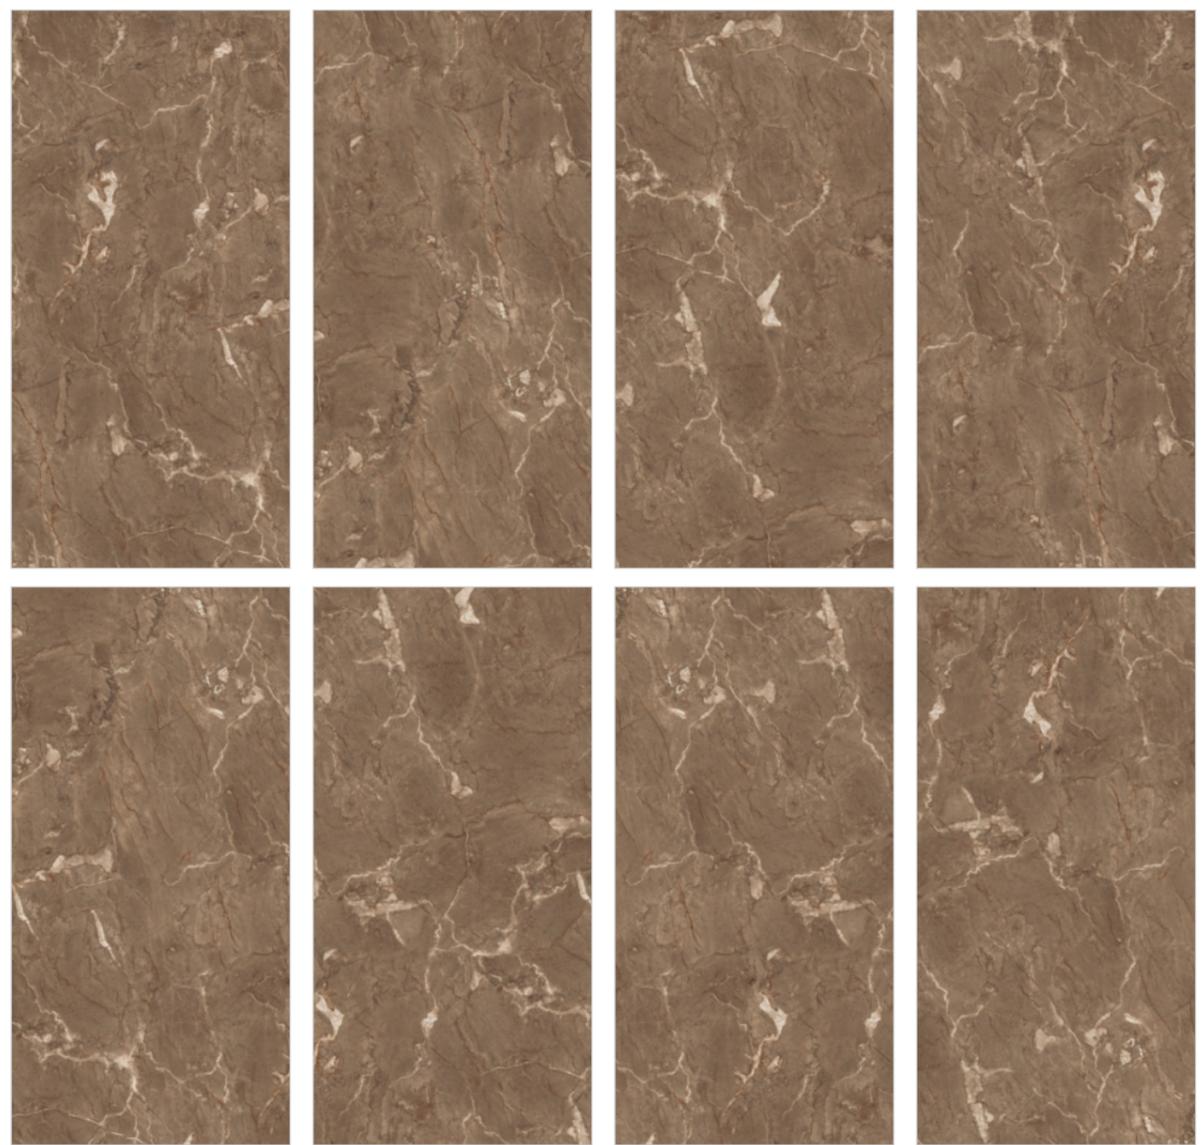

Random
08
600x1200mm



Crescent Crema




Random
08
600x1200mm



Crescent Crema



Crescent Grey

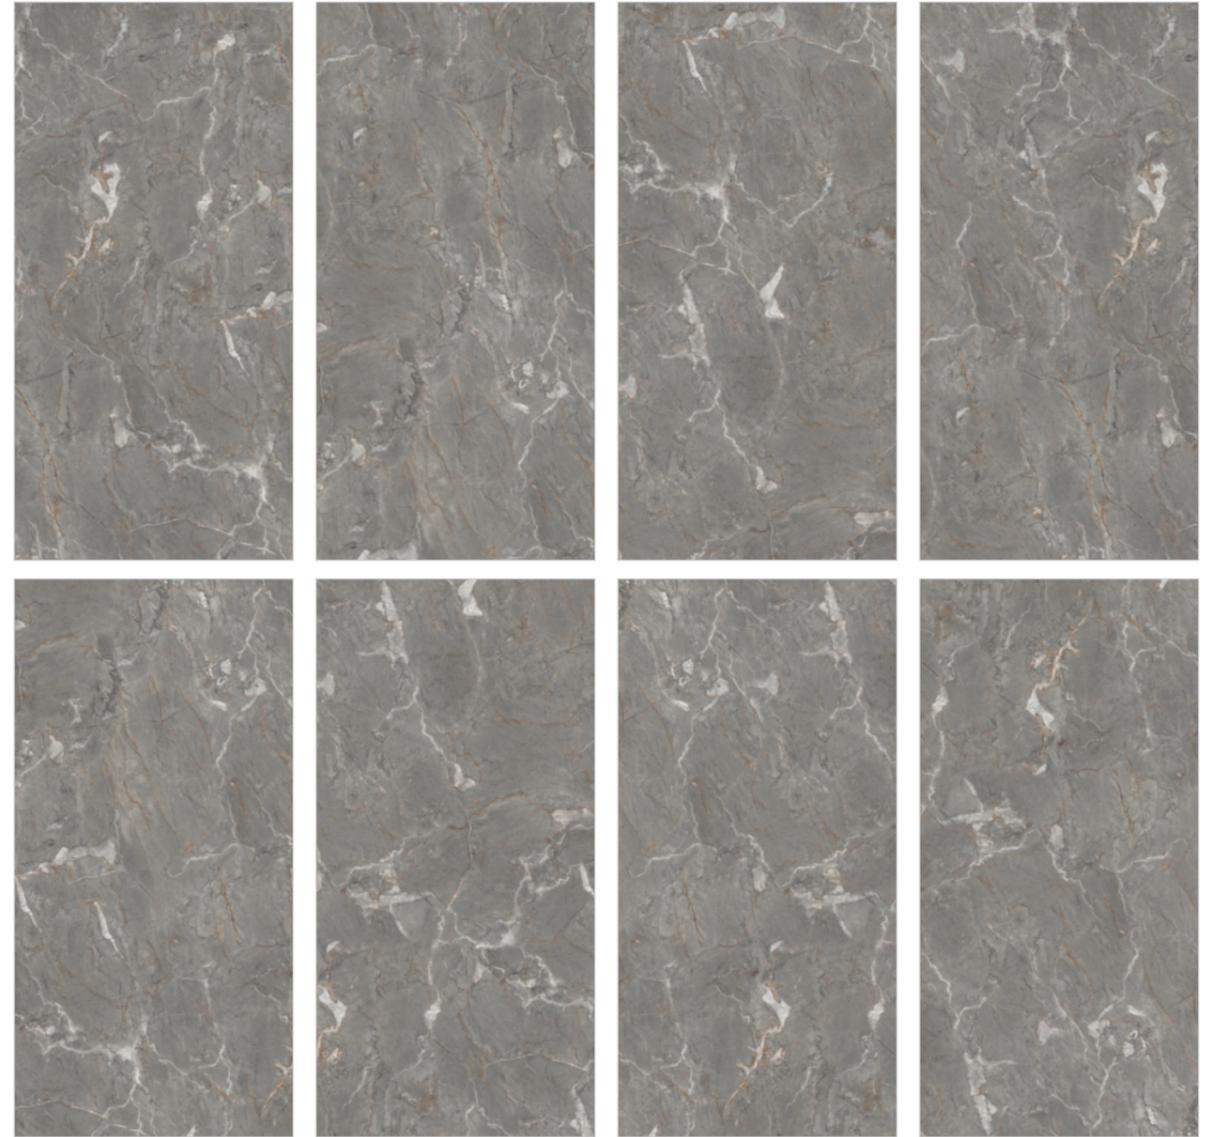

Random
08
600x1200mm



Cypress Crema




Rendom
08
600x1200mm



Denmark Crema

glossy

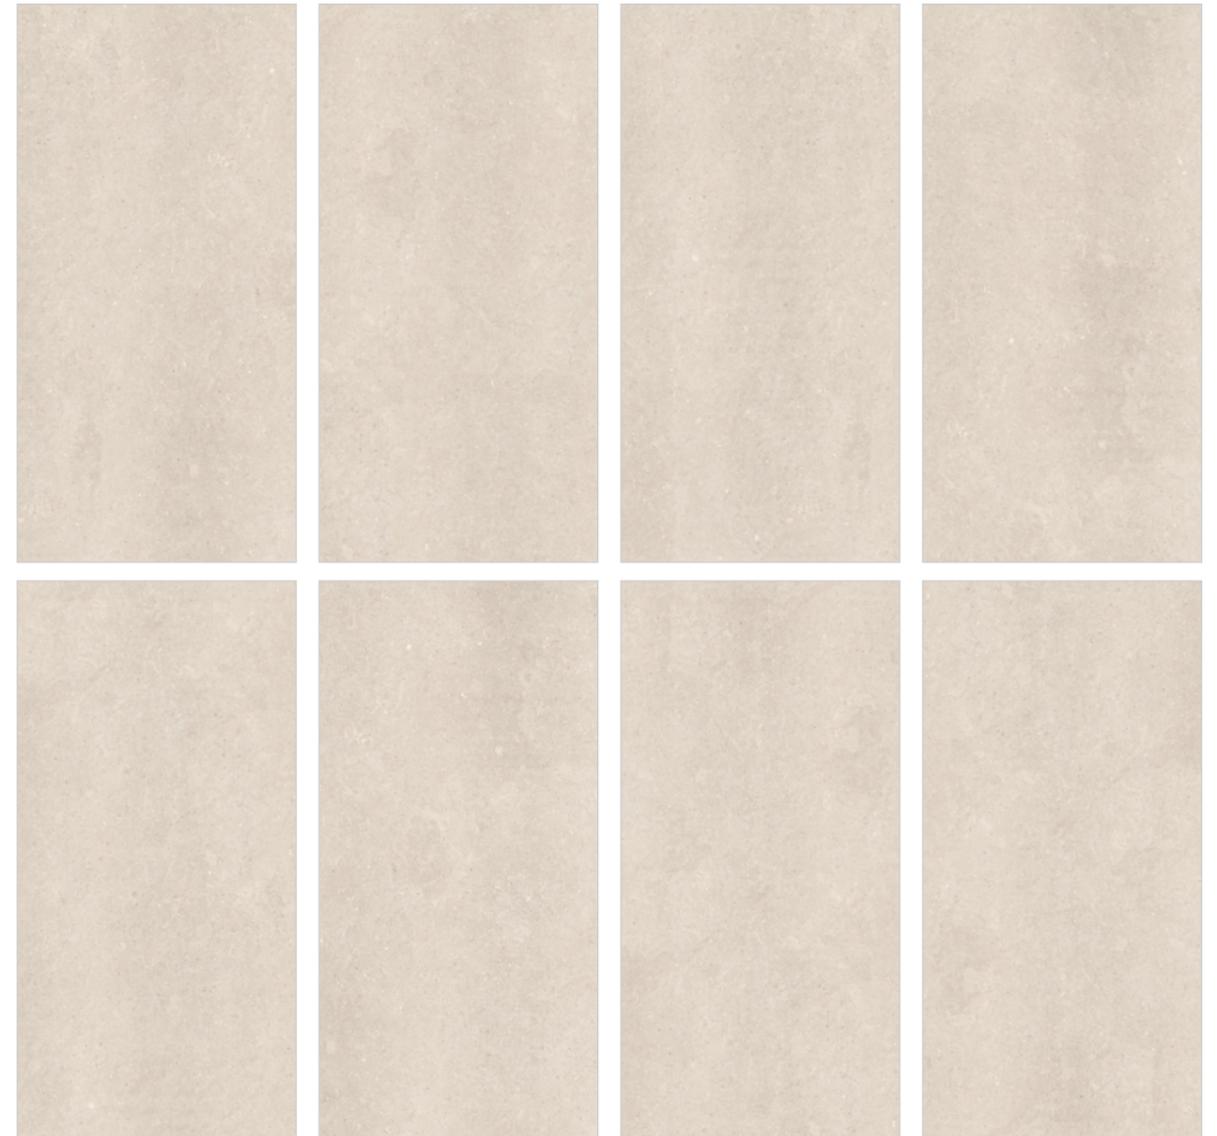


Rendom
08
600x1200mm



Denmark Crema



Denmark Grey

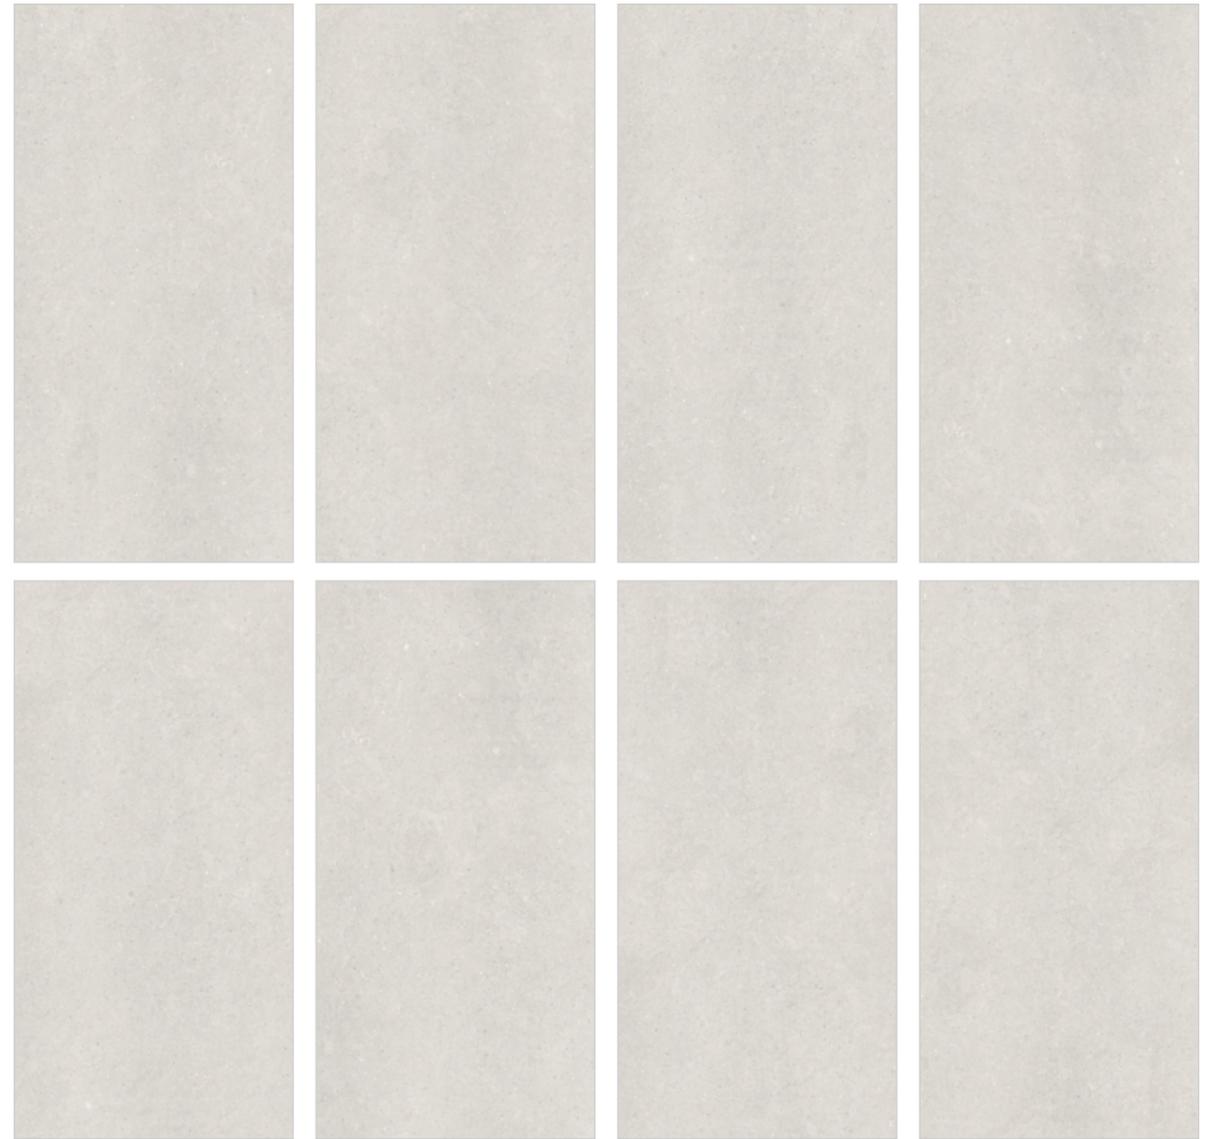

Rendom
08
600x1200mm



Femina Brown



Rendom
09
600x1200mm



Femina Grey




Rendom
09
600x1200mm



Femina Grey



Gardena Staturio

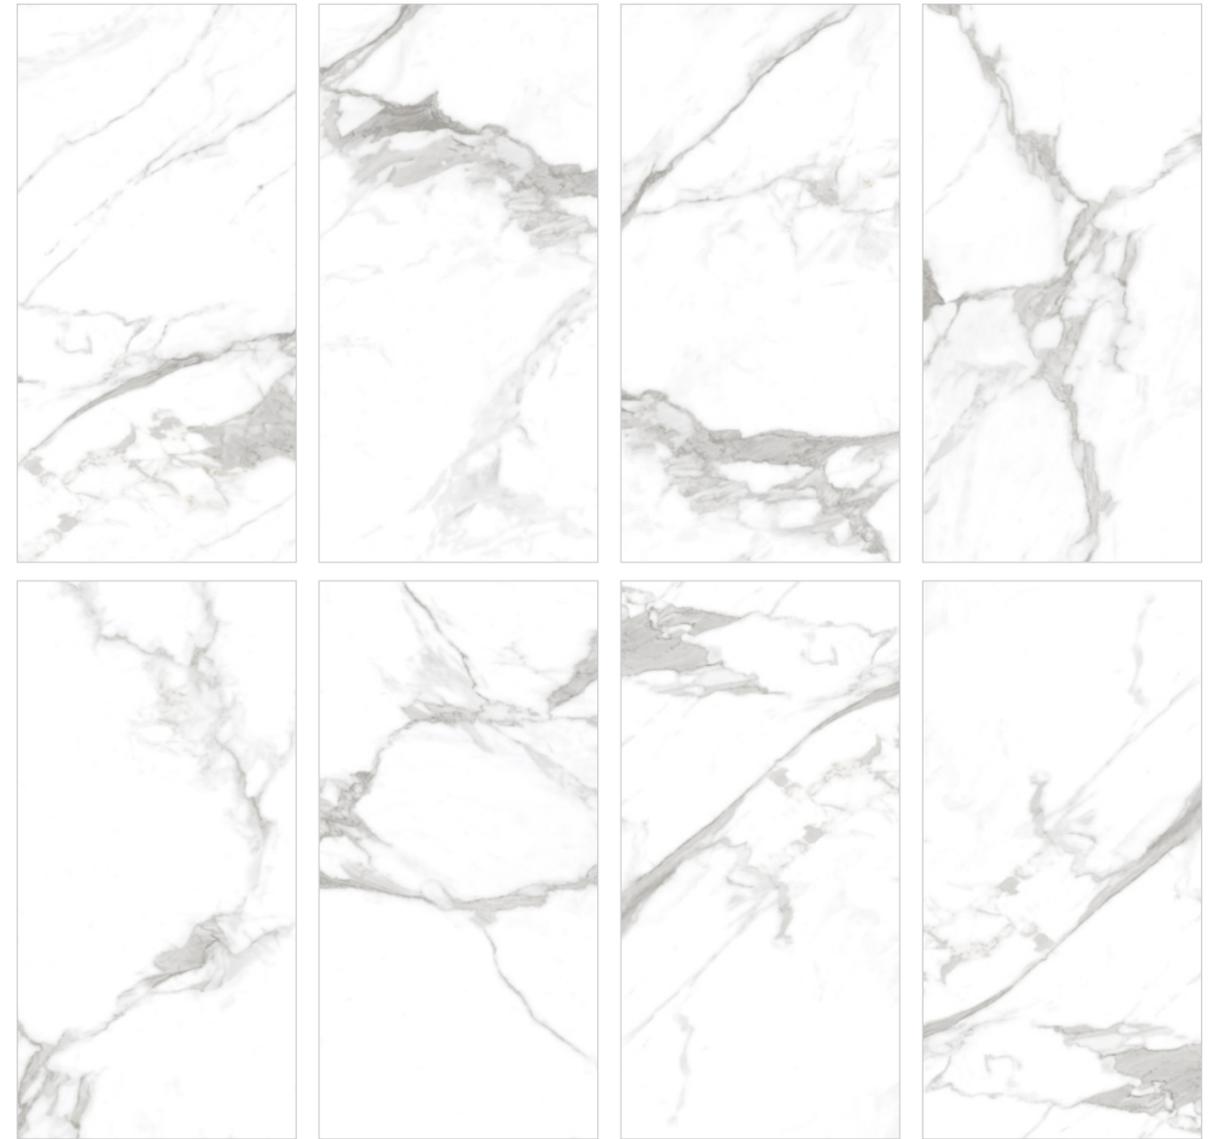

Rendom
08
600x1200mm



Hoover Beige

glossy



Rendom
10
600x1200mm



Lithia Natural

glossy



Rendom
08
600x1200mm



Lithia Natural



Hoover Crema



Rendom
10
600x1200mm

Makrana Bianco



Rendom
08
600x1200mm



Makrana Grey



Random
08
600x1200mm



Makrana Grey



Makrana Gris




Random
08
600x1200mm



Munich Beige



Rendom
09
600x1200mm

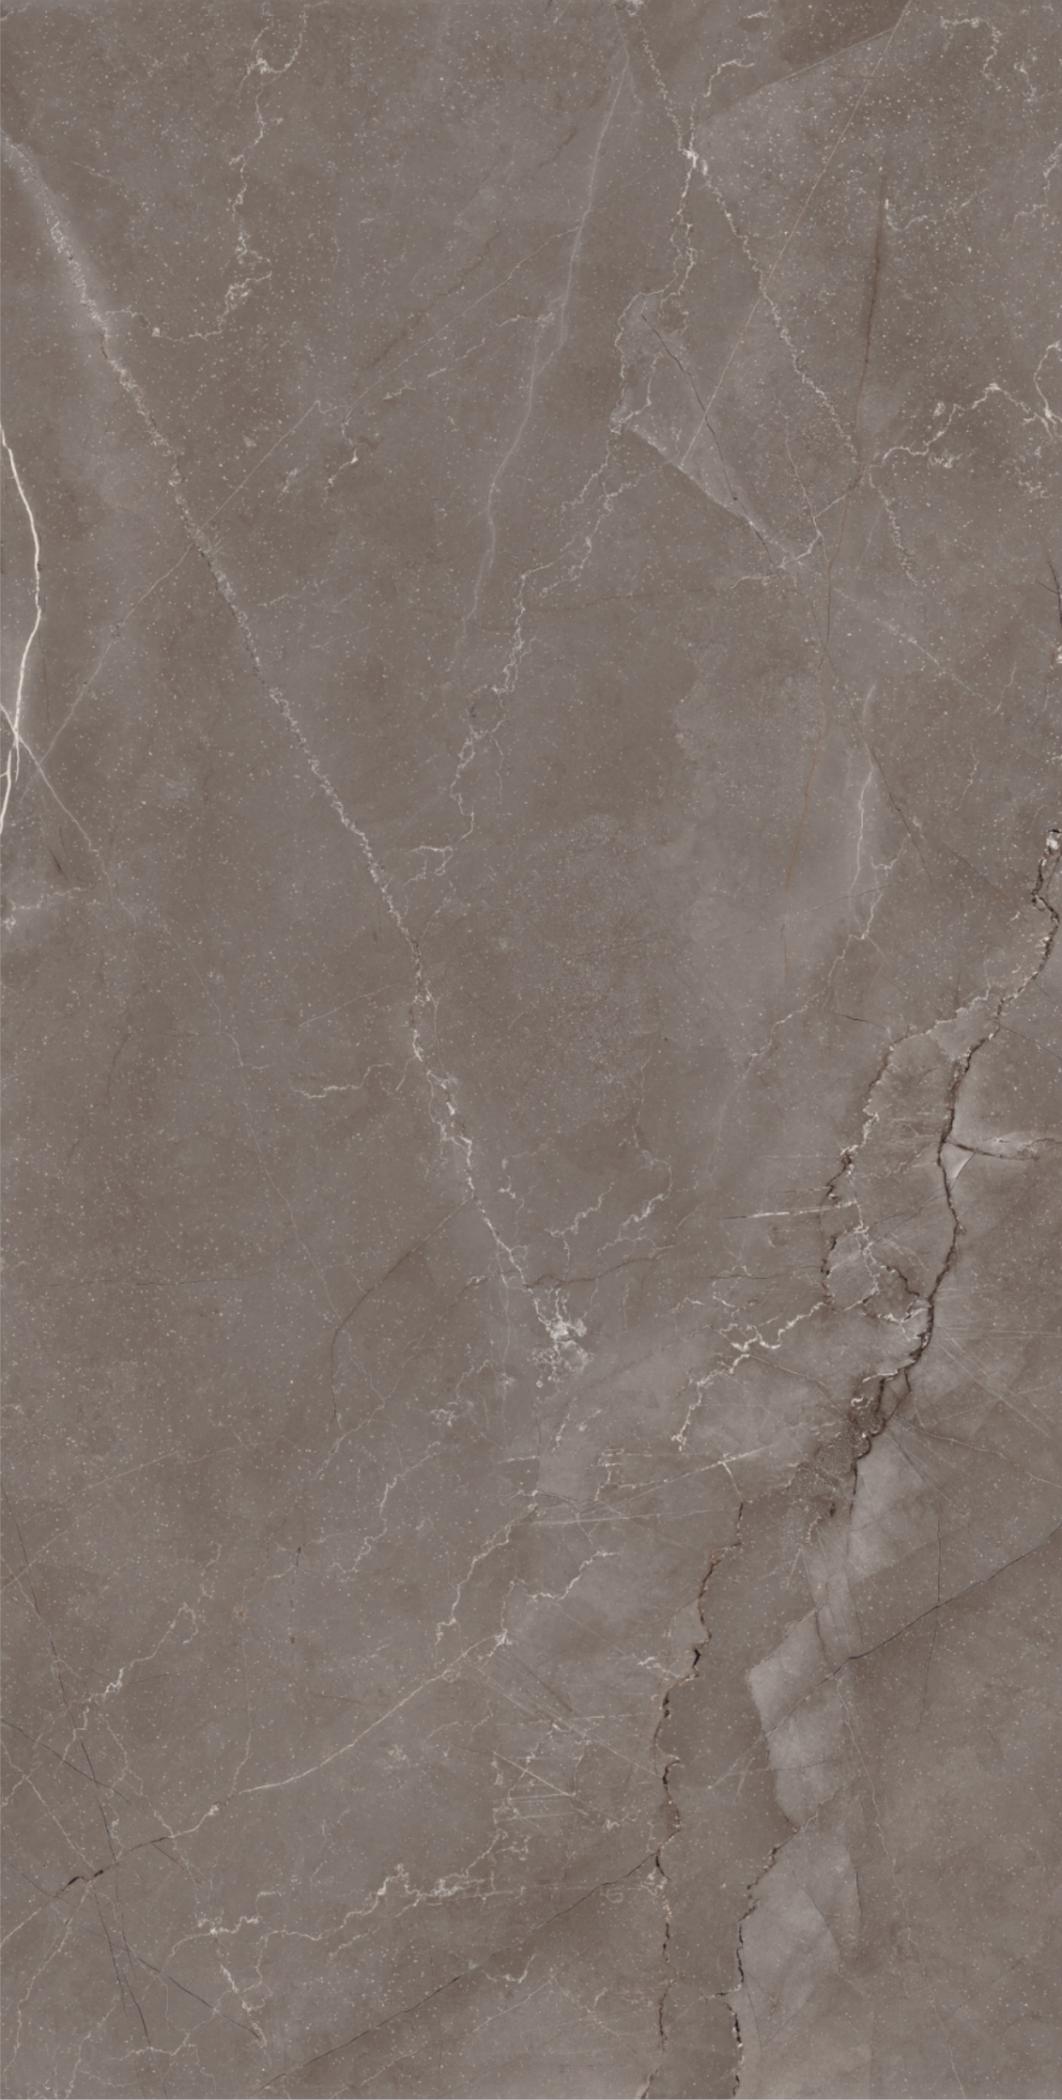

Munich Choco



Rendom
09
600x1200mm



Munich Choco


Munich Bianco



Rendom
09
600x1200mm



Smoky Brown

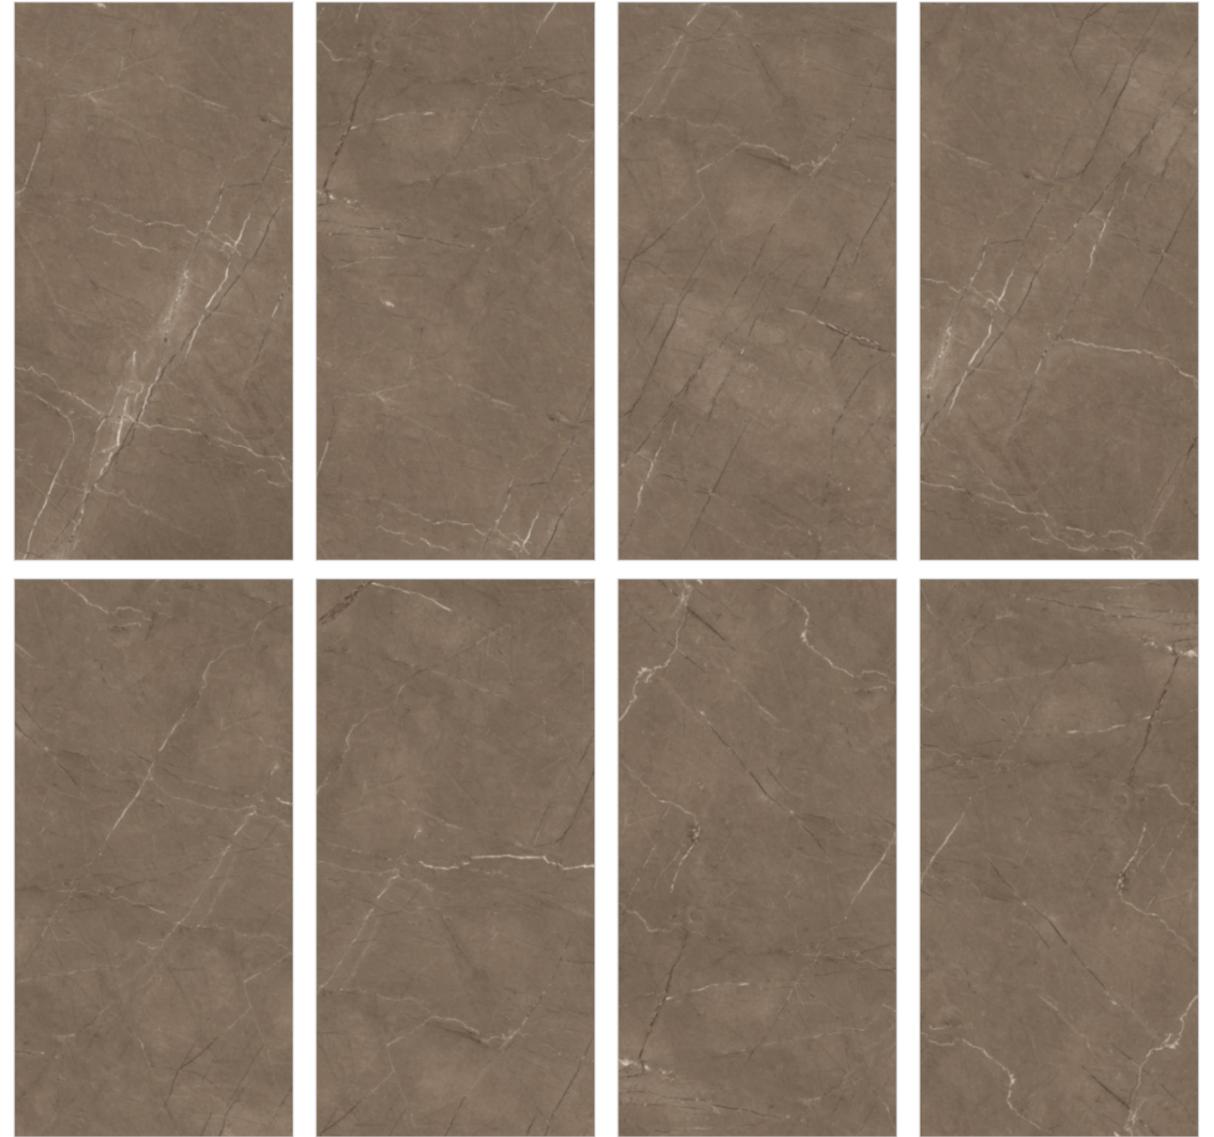

Rendom
08
600x1200mm



Smoky Crema

glossy



Rendom

08

600x1200mm



Smoky Grey



Rendom
08
600x1200mm



Smoky Grey



Smoky Gris



Rendom
08
600x1200mm



Softmarbo Brown



Rendom
07
600x1200mm



Softmarbo Crema



Rendom
07
600x1200mm



Softmarbo Crema




Softmarbo Grey



Rendom
07
600x1200mm

Storex Beige


glossy

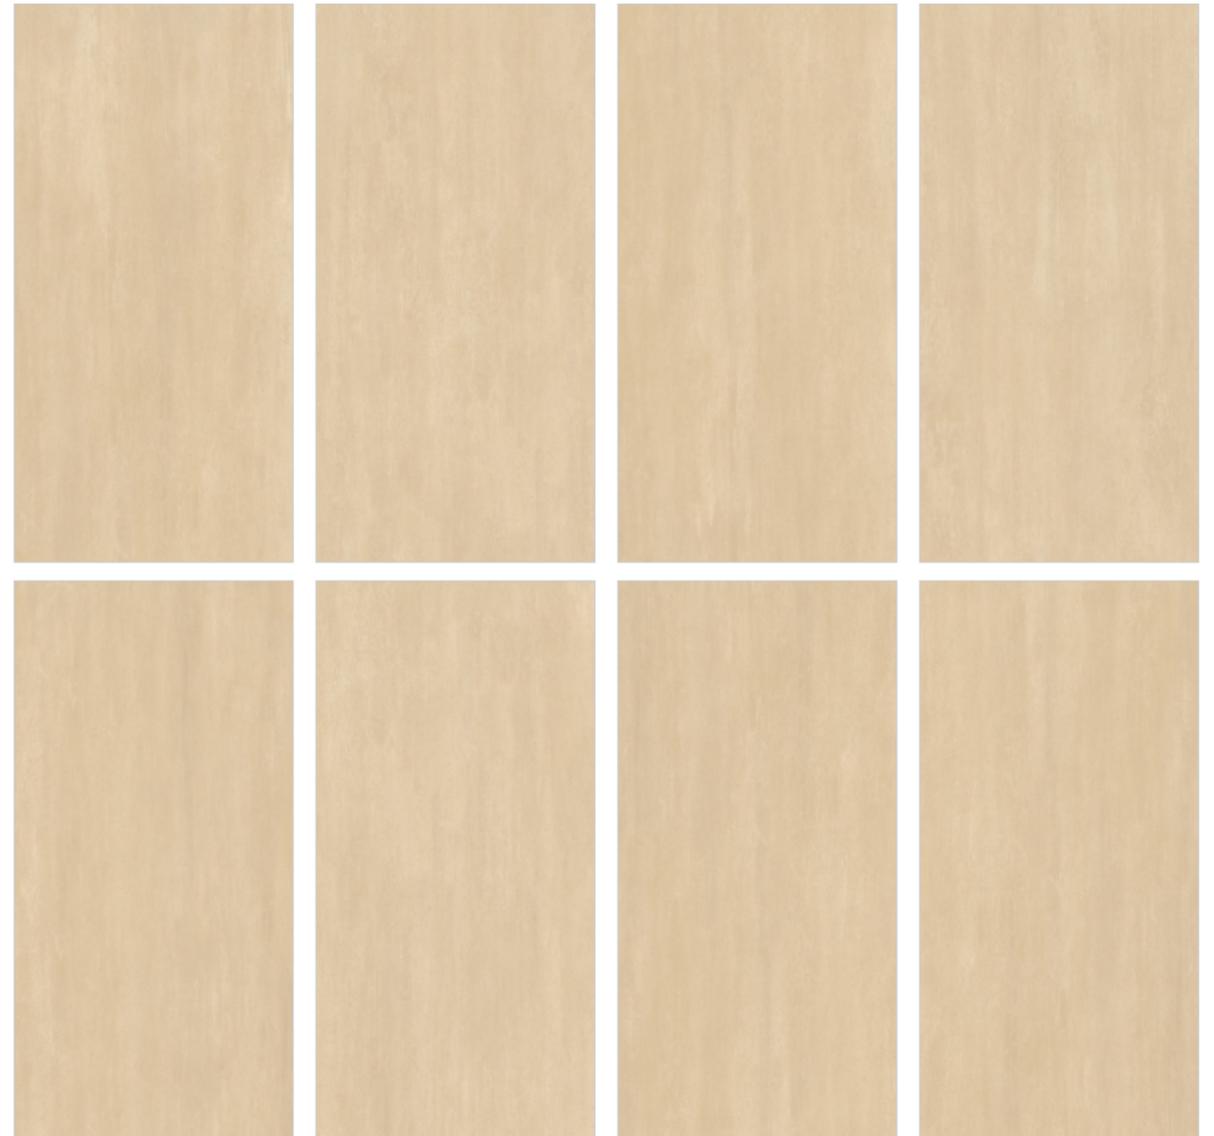

Rendom
08
600x1200mm

Storex Bianco

glossy

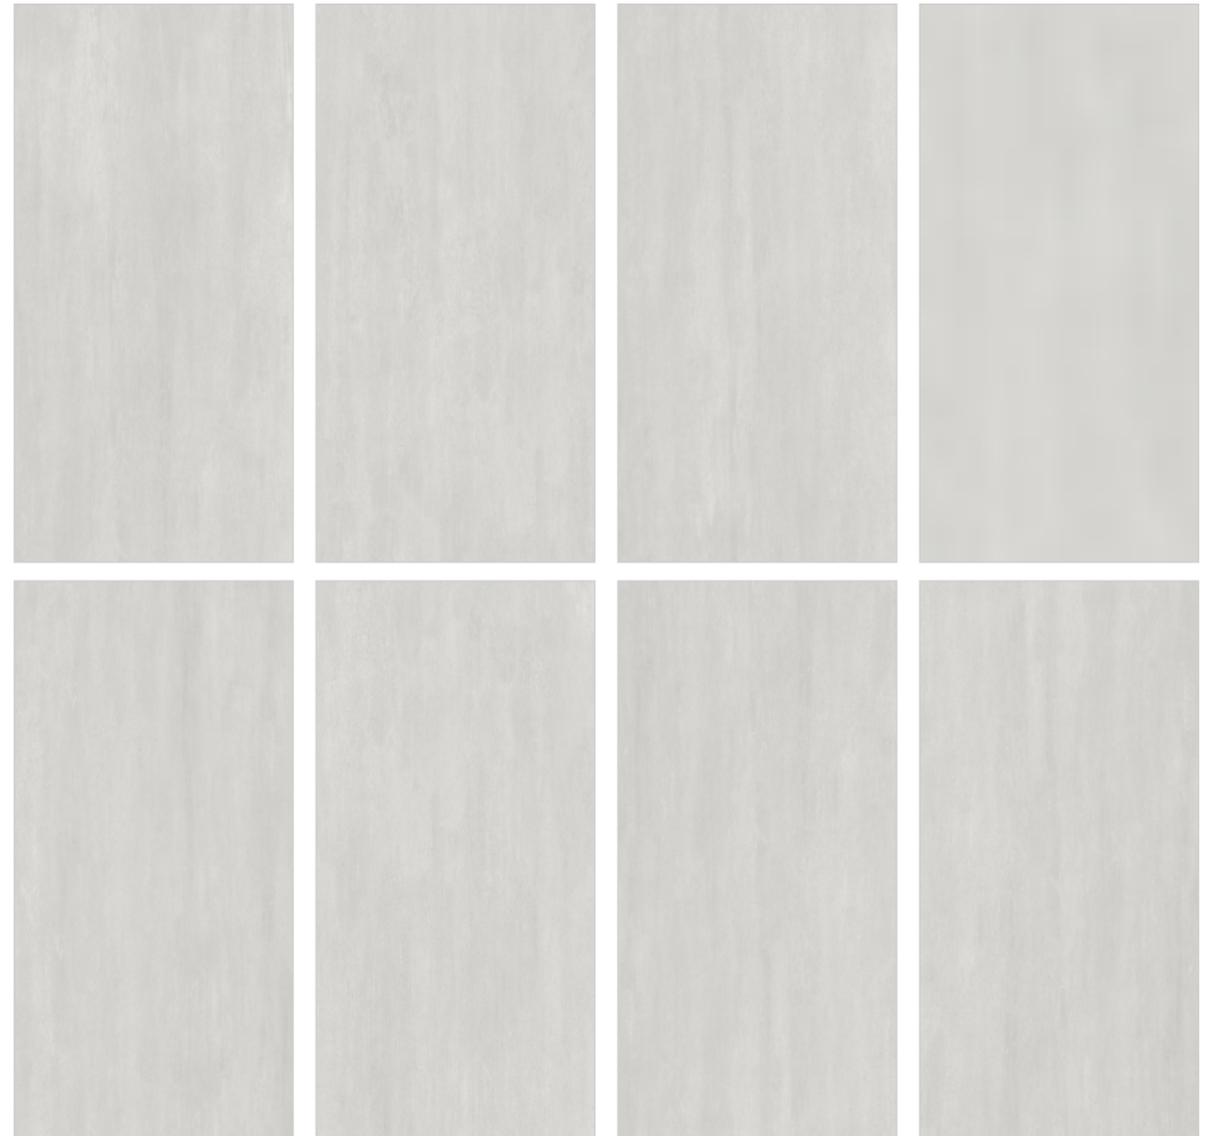


Rendom
08
600x1200mm



Storex Bianco

Storex Grey

glossy

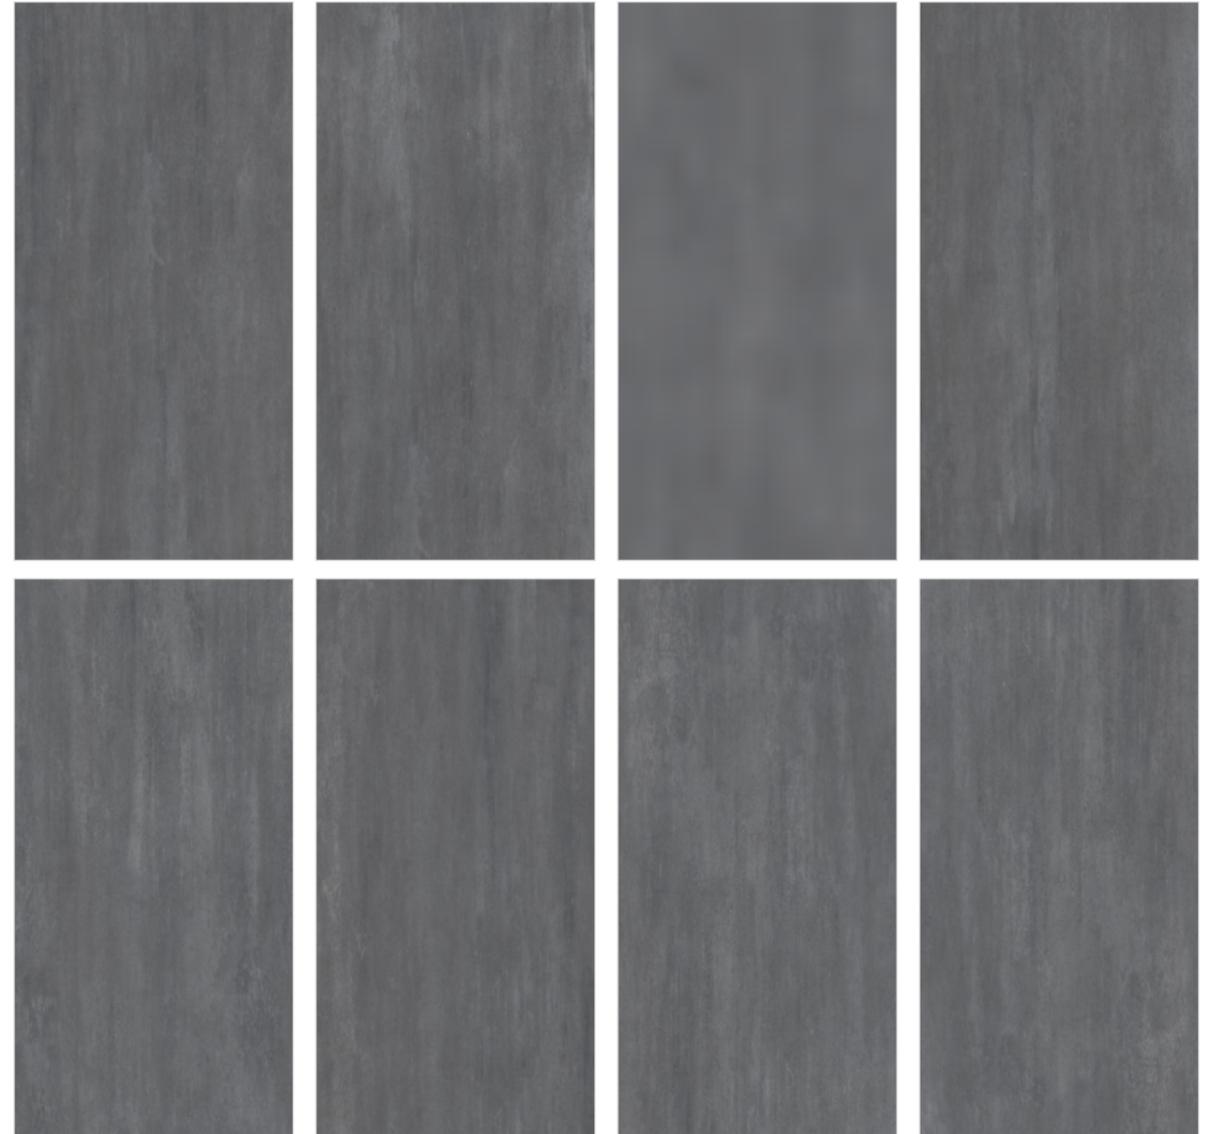

Rendom
08
600x1200mm



Tonner Beige

glossy



Random
07
600x1200mm



Tonner Grey




Rendom
07
600x1200mm



Tonner Grey



Vitara Beige

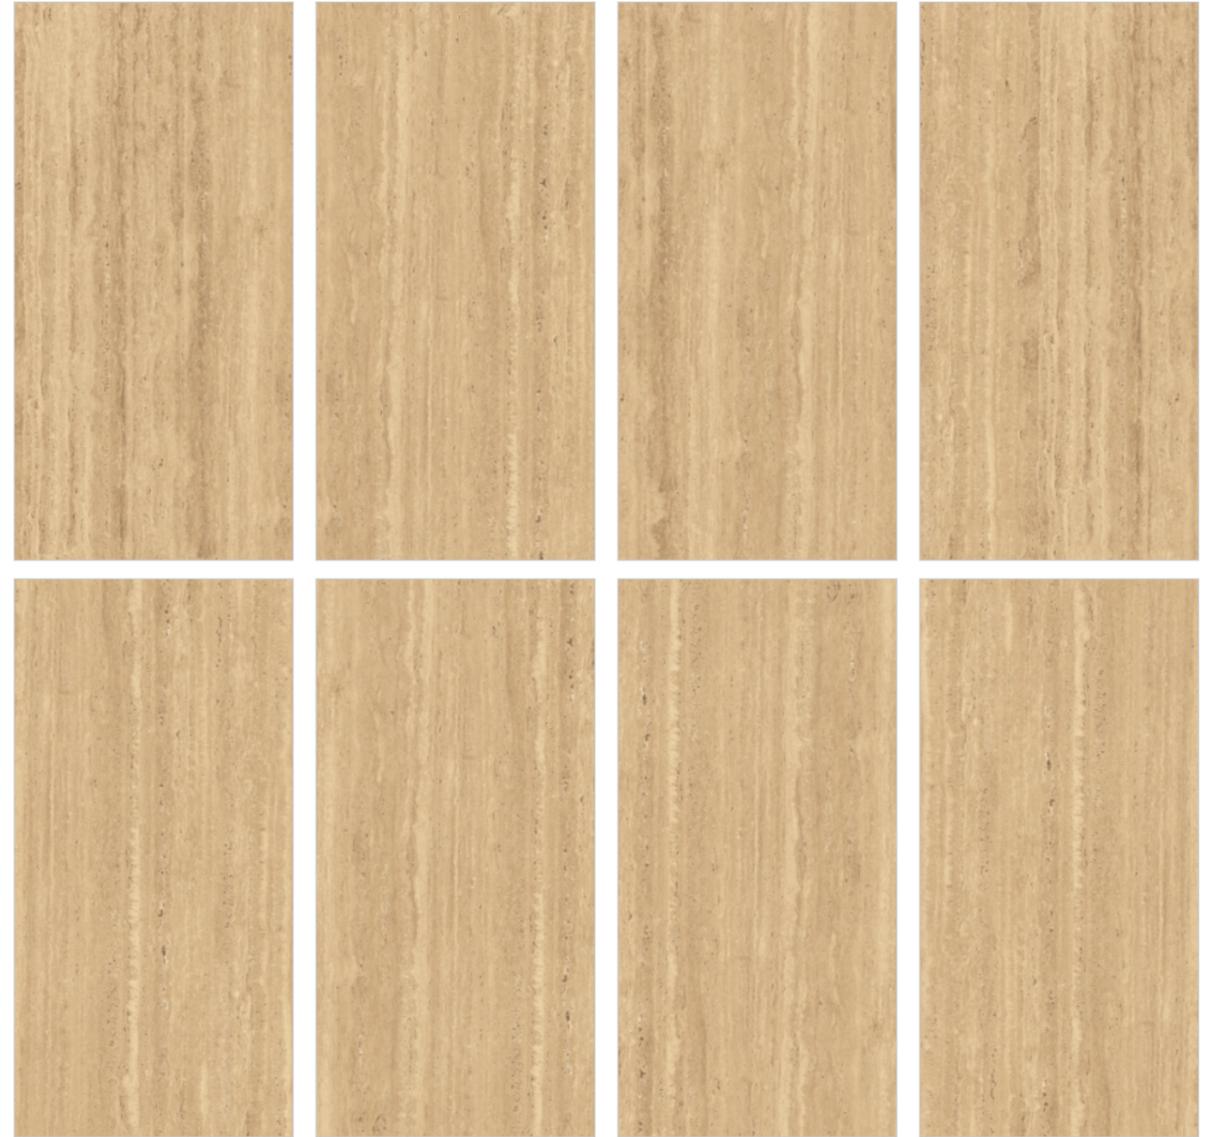

Rendom
07
600x1200mm



Vitara Crema

glossy




Random

07

600x1200mm



Vitara Gris

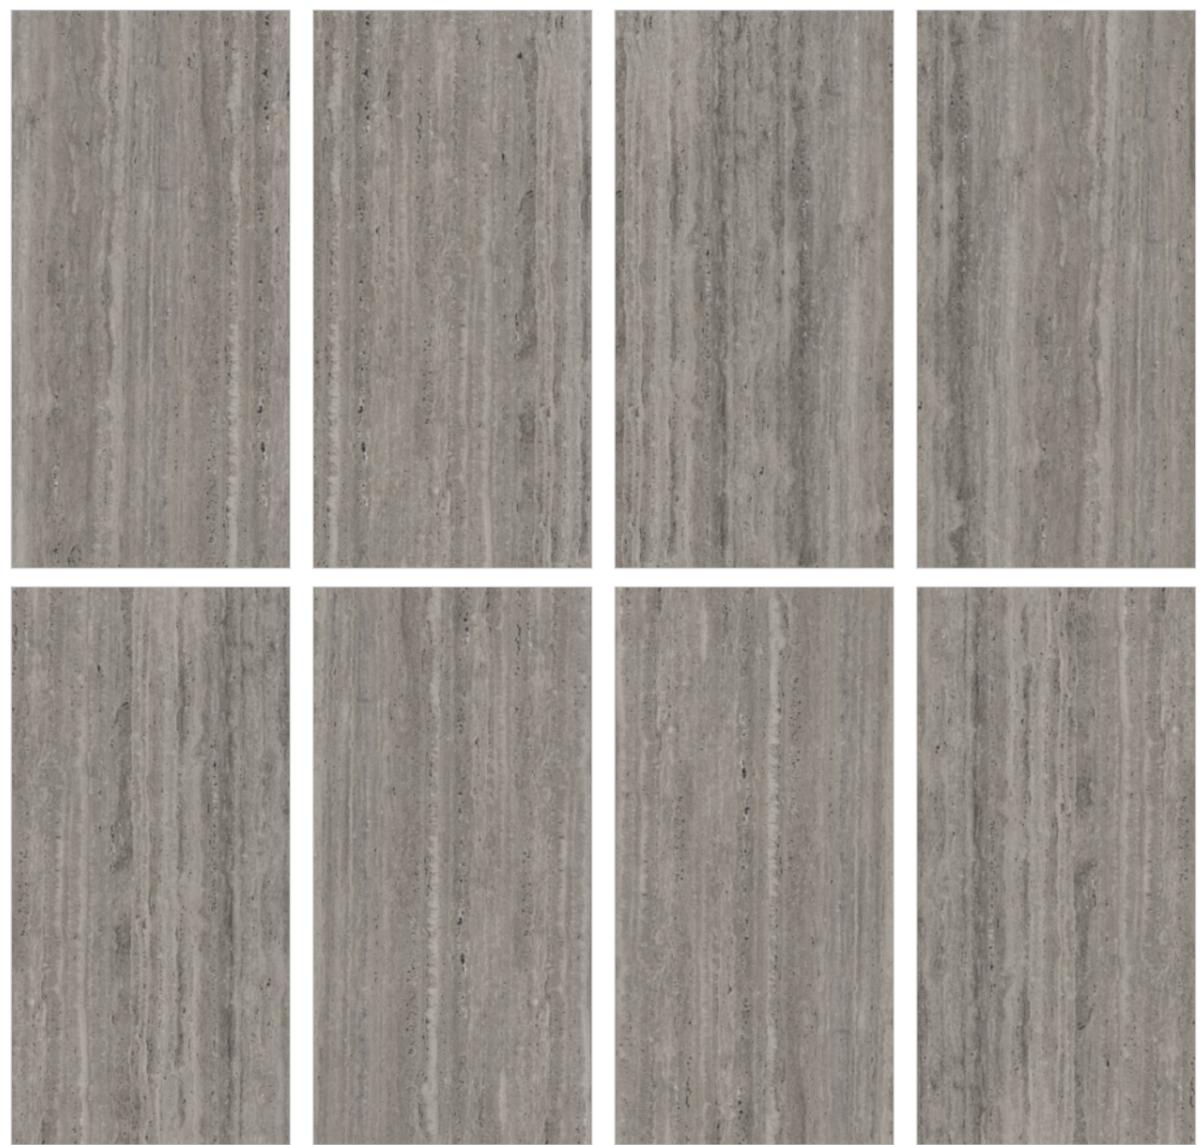

Rendom
07
600x1200mm




Vitara Gris



Walker Bianco

glossy

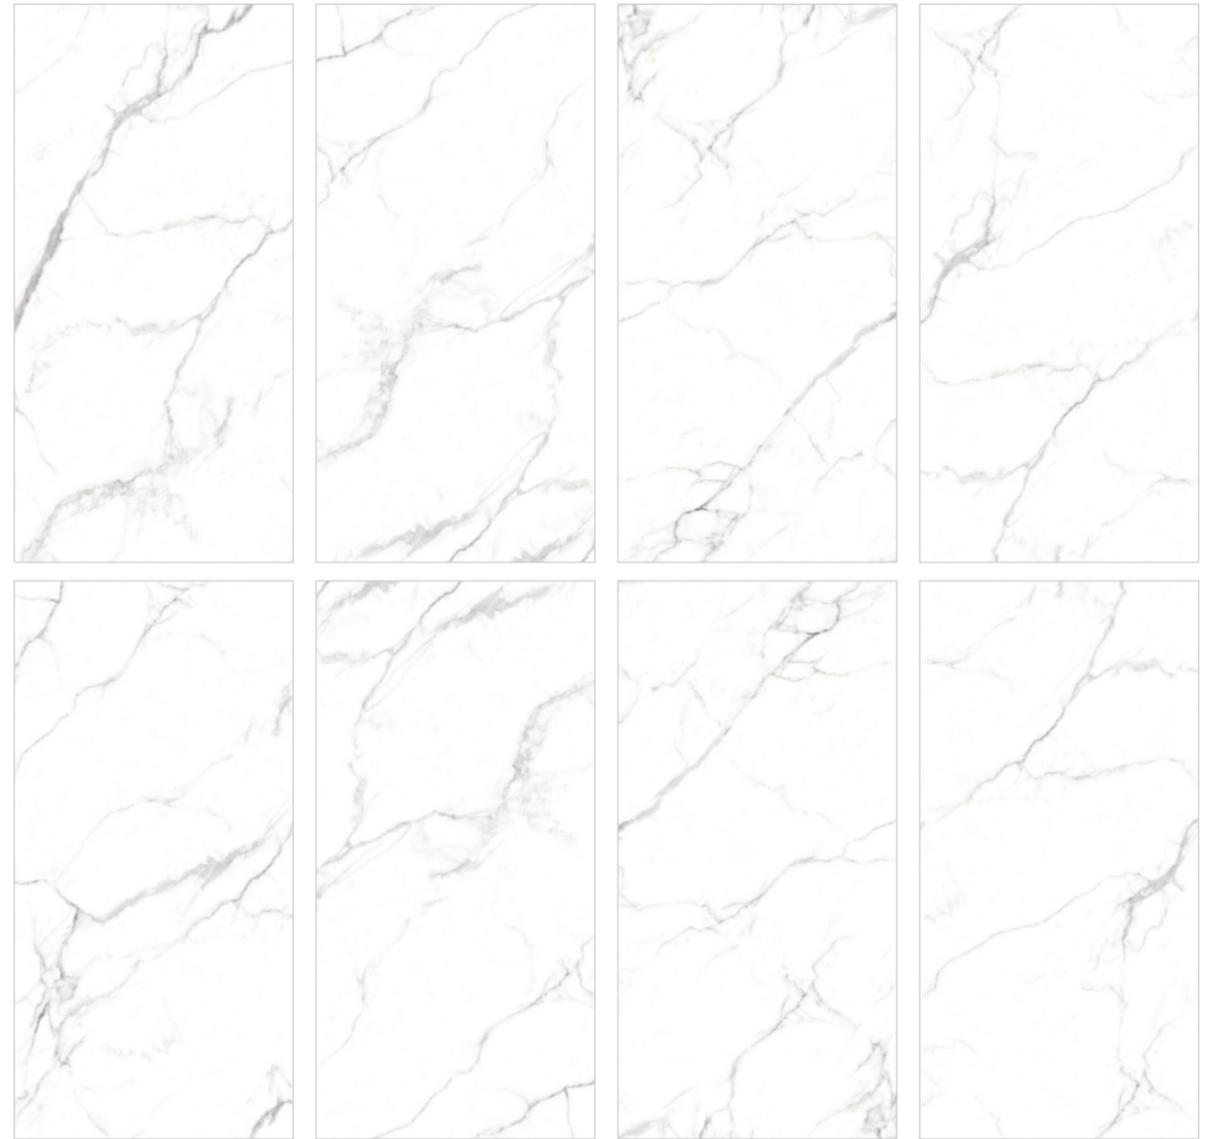

Rendom
06
600x1200mm

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/ EN14411 GROUP B1a	VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.1%	ISO-10545-2
Deviation in thickness	± 5.0%	± 4.0%	ISO-10545-2
Straightness in sides	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Surface quality	Min. 95% defect free	> 95%	ISO 10545-2
Colour difference	Unaltered	Unaltered	ISO-10545-16
Glossiness	> 90 GU	> 94 GU	Gloss meter 60°
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.20 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	> 35 N/mm ²	> 40 N/mm ²	ISO-10545-4
Breaking strength	> 1300 N	> 1800 N	ISO-10545-4
Impact resistance (COR)	>0.55	>0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	Declared class	Class PEI 3	EN 154
Surface scratch hardness (Mohs scale)	5	5	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	Test passed in accordance with test method	Pass	ISO-10545-12
Thermal shock resistance	Min. 10 cycle	Pass	ISO-10545-9
Moisture expansion	0.06mm/m	0.01mm/m	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10	Max. 6.5 x 10	ISO-10545-8
Crazing resistance	No damage	No damage	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14
SAFETY PROPERTIES			
Slip resistance (COF)	Declared value	> 0.40 dry, <0.40 wet	ISO-10545-17
Reaction to fire	Class A1 or A1 fl	Class A1 - A1fl	N.A

PACKING DETAILS

Size	pcs / box	m ² / Box
600x1200mm	2 pcs	1.44 Sq.Mtr.

